


形状・寸法/特性

Shapes and dimensions/Characteristics

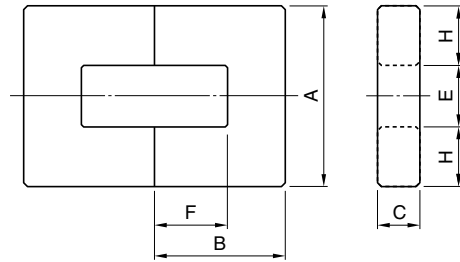

形状 Type	寸法 Dimensions(mm)								Bobbin
	A	2B	B	C	E	2F min.	F	H	
UU-9.7L	9.70±0.30	14.7	7.35±0.15	2.70±0.15	4.30±0.30	8.30	4.30±0.15	2.70±0.15	
UU-10.5D	10.5±0.15	15.6	7.80±0.10	5.00±0.15	5.50±0.15	10.0	5.25±0.25	2.50±0.20	○
UU-10.5T	10.5±0.2	15.8	7.90±0.10	5.00±0.15	5.30min.	10.2	5.35±0.25	2.50±0.20	○
UU-12L	12.0±0.3	17.3	8.65±0.10	5.10±0.15	6.15min.	11.7	5.95±0.10	2.75	
UU-15.7D	15.7±0.3	19.4	9.70±0.20	6.00±0.20	6.50min.	11.7	6.00±0.15	4.50	
UU-16K	16.0±0.2	21.4	10.7±0.15	6.00±0.15	6.84±0.30	11.9	6.10±0.15	4.58±0.10	
UU-19.7K	19.7±0.3	35.4	17.7±0.2	5.95±0.2	7.4min.	23.0	11.7±0.2	6.00±0.15	
UU-22K	22.15±0.55	21.6	10.8±0.2	5.80±0.20	10.0±0.3	9.2	5.00±0.40	6.10	
UU-25K	23.3±0.5	26.0	13.0±0.3	6.25±0.25	10.7±0.2	13.1	6.75±0.20	6.30±0.20	
UU-79A	79.0±0.5	129	64.5±1.25	31.5±1.0	34.0min.	83.5	42.5±0.75	22.0	
UU-93K	93.0±1.8	152	76.0±0.5	30.0±0.5	34.6min.	94.2	48.0±0.9	28.0	
UU-100L	100.0±3.0	151	75.5±1.25	30.0±1.0	39.0min.	88.5	45.0±0.75	30.0	
UU-100K	100.0±3.0	160	80.0±1.25	20.0±1.0	39.0min.	98.5	50.0±0.75	30.0	
UU-101K	101.2±3.1	114.6	57.3±0.8	25.4±0.8	51.0±3.1	62.2	31.9±0.8	25.1	
UU-120K	120.0±3.0	160.0	80.0±1.25	20.0±1.0	59.0min.	98.5	50.0±0.75	30	

形状 Type	AL value(nH/N ²)±30%					コア定数 Core parameters					Weight (g/set)
	MB3	MA055	MA070	MA085	MA100	Ci(mm ⁻¹)	Le(mm)	Ae(mm ²)	Amin(mm ²)	Ve(mm ³)	
UU-9.7L	510	945	1130	1210	1320	4.57	34.7	7.61	7.3	264	1.4
UU-10.5D	750	1320	1590	1690	1830	3.17	39.9	12.6	12.5	503	2.6
UU-10.5T	750	1320	1580	1680	1820	3.20	40.3	12.6	12.5	508	2.6
UU-12L	760	1280	1610	1720	1870	3.26	45.4	13.9	13.8	632	3.3
UU-15.7D	1110	1820	2060	2680	2910	2.02	49.9	24.8	22.2	1240	6.6
UU-16K	1190	1950	2230	2870	3110	1.91	52.5	27.5	27.5	1440	7.6
UU-19.7K	1120	2140	2310	2850	3130	2.27	81.0	35.7	35.7	2890	15.1
UU-22K	1380	2570	3090	3310	3590	1.70	58.6	34.4	33.6	2020	10.8
UU-25K	1500	2630	3200	3440	3750	1.74	68.1	39.2	39.1	2670	14.1
UU-79A	6620	13570				0.446	309	693	693	214000	1100
UU-93K	7060	14590				0.421	354	840	840	297000	1540
UU-100L	7380	15250				0.392	355	905	905	321300	1630
UU-100K	4780	9920				0.623	374	600	600	224400	1130
UU-101K	6120	12500				0.482	309	641	638	198000	910
UU-120K	4340	9050				0.690	414	600	600	248400	1240