


形状・寸法／特性

Shapes and dimensions/Characteristics

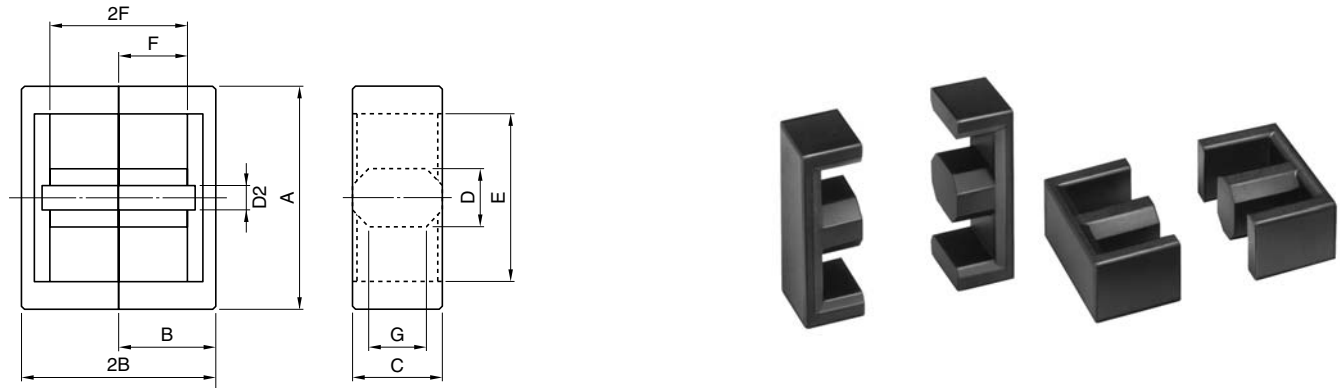

| 形状<br>Type | 寸法 Dimensions(mm) |      |           |            |           |      |        |         |           |      |
|------------|-------------------|------|-----------|------------|-----------|------|--------|---------|-----------|------|
|            | A                 | 2B   | B         | C          | D         | D2   | E min. | 2F min. | F         | G    |
| EEH-22L    | 22.0±0.4          | 19.2 | 9.60±0.20 | 9.00±0.20  | 6.50±0.15 | 2.45 | 16.0   | 13.2    | 6.80±0.20 | 5.35 |
| EEH-22K    | 22.0±0.4          | 29.0 | 14.5±0.2  | 9.00±0.20  | 6.50±0.15 | 2.45 | 16.0   | 23.0    | 11.7±0.2  | 5.35 |
| EEH-28A    | 28.0±0.4          | 20.4 | 10.2±0.15 | 11.9±0.2   | 8.50±0.15 | 2.76 | 20.7   | 13.2    | 6.80±0.20 | 6.55 |
| EEH-29M    | 29.3±0.4          | 18.2 | 9.10±0.20 | 12.05±0.25 | 8.50±0.15 | 3.5  | 21.6   | 10.6    | 5.50±0.20 | 7.2  |
| EEH-29L    | 29.3±0.4          | 21.8 | 10.9±0.2  | 12.05±0.25 | 8.50±0.15 | 3.5  | 21.7   | 14.2    | 7.30±0.20 | 7.2  |
| EEH-29K    | 29.3±0.4          | 29.2 | 14.6±0.2  | 12.05±0.25 | 8.50±0.15 | 3.5  | 21.7   | 21.6    | 11.0±0.2  | 7.2  |
| EEH-29N    | 29.3±0.4          | 29.6 | 14.8±0.2  | 12.05±0.25 | 8.50±0.20 | 3.5  | 21.6   | 22.0    | 11.2±0.2  | 7.2  |
| EEH-33A    | 33.0±0.5          | 25.0 | 12.5±0.2  | 11.85±0.25 | 8.35±0.30 | 2.9  | 25.5   | 17.5    | 8.93±0.18 | 7.3  |
| EEH-33K    | 33.0±0.5          | 33.4 | 16.7±0.2  | 13.0±0.3   | 10.5±0.3  | 3.0  | 23.5   | 24.7    | 12.5±0.15 | 7.5  |

| 形状<br>Type | AL value(nH/N <sup>2</sup> )±25% |      |      |      | コア定数 Core parameters               |        |                      |                        |                      | Weight<br>(g/set) |
|------------|----------------------------------|------|------|------|------------------------------------|--------|----------------------|------------------------|----------------------|-------------------|
|            | MB1                              | MB3  | MB4  | MBT1 | C <sub>1</sub> (mm <sup>-1</sup> ) | Le(mm) | Ae(mm <sup>2</sup> ) | Amin(mm <sup>2</sup> ) | Ve(mm <sup>3</sup> ) |                   |
| EEH-22L    | 2210                             | 2450 | 2450 | 3200 | 0.857                              | 42.5   | 49.7                 | 49.2                   | 2110                 | 12.0              |
| EEH-22K    | 1640                             | 1900 | 1900 | 2470 | 1.25                               | 62.1   | 49.7                 | 49.2                   | 3090                 | 16.8              |
| EEH-28A    | 3330                             | 3930 | 3930 | 4850 | 0.572                              | 46.6   | 81.4                 | 80.2                   | 3790                 | 22.0              |
| EEH-29M    | 3770                             | 4430 | 4430 | 5430 | 0.493                              | 42.4   | 86.1                 | 84.8                   | 3660                 | 21.6              |
| EEH-29L    | 3360                             | 3500 | 3500 | 4910 | 0.576                              | 49.6   | 86.2                 | 84.8                   | 4280                 | 24.7              |
| EEH-29K    | 2740                             | 3000 | 3000 | 4110 | 0.746                              | 64.4   | 86.4                 | 84.8                   | 5570                 | 31.0              |
| EEH-29N    | 2710                             | 3000 | 3000 | 4080 | 0.755                              | 65.2   | 86.4                 | 84.8                   | 5640                 | 31.3              |
| EEH-33A    | 2790                             | 3100 | 3100 | 4170 | 0.721                              | 60.0   | 83.2                 | 80.9                   | 5000                 | 28.1              |
| EEH-33K    | 3250                             | 3860 | 3860 | 4930 | 0.638                              | 72.2   | 113                  | 109                    | 8180                 | 45.8              |